

Qehribar

Product Data Sheet

Enclosures



Qehribar

Contact



www.qehribar.com



Sales@qehribar.com



+90 542 306 4047



Enclosures


Watertight Outdoor Distribution Board

With Roof - Blank and Transparent Door



Product Description

Qehribar Watertight Distribution Boards with Roof are wall-mounted outdoor low-voltage distribution enclosures developed for installations requiring IP65 protection together with additional shielding from direct top-side weather exposure. The integrated canopy is intended for heavy rain or snow areas, helping protect the enclosure face while maintaining access to the board. The range is specified with up to IK10 impact resistance, UV-resistant construction, blank or transparent door options, and an operating temperature range of -25°C to +60°C. Its stated conformity to IEC 61439-3 supports its use as an outdoor distribution-board system.

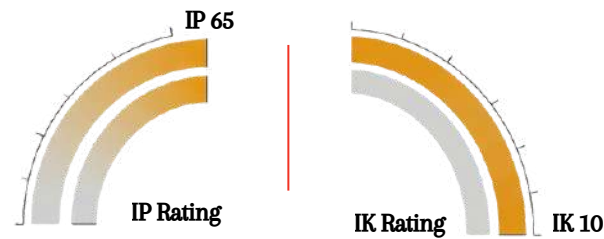

Application / Use


Designed for outdoor wall-mounted LV distribution in exposed service locations, especially where rain or snow loading from above makes a canopy-protected board more appropriate than a standard weatherproof enclosure.

Features

- Outdoor wall-mounted distribution board
- Integrated weather-protection roof
- IP65 protection
- Up to IK10 impact resistance
- Blank or transparent door
- UV-resistant construction
- IEC 61439-3 aligned
- Operating temperature: -25°C to +60°C

Available Range

Product	Wall Mounted
Material	ABS / PC / Metal
IP Rating	IP 65
IK Rating	Up to IK 10
Installation	Wall Mounted
Operational Temperature	-25°C to +60°C
Cover Option	Blank and Transparent

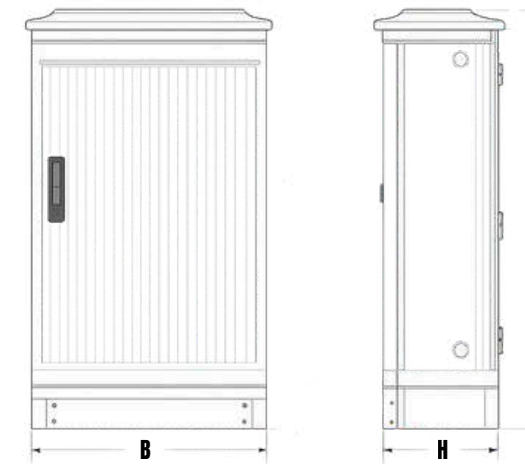

Model Selection

Item Code	Type	Material	Dimensions mm	IP Rating	Cover
QPE-00003H-000	Blank	ABS/PC/Metal	300 x 400 x 165	IP65	Transparent
QPE-00003I-000	Blank	ABS/PC/Metal	400 x 500 x 175	IP65	Transparent
QPE-00003J-000	Blank	ABS/PC/Metal	400 x 600 x 200	IP65	Transparent
QPE-00003K-000	Blank	ABS/PC/Metal	500 x 700 x 245	IP65	Transparent
QPE-00003L-000	Blank	ABS/PC/Metal	350 x 500 x 195	IP65	Transparent
QPE-00003M-000	Blank	ABS/PC/Metal	500 x 600 x 220	IP65	Transparent
QPE-00003N-000	Blank	ABS/PC/Metal	600 x 800 x 260	IP65	Transparent
QPE-00003P-000	Transparent	ABS/PC/Metal	300 x 400 x 165	IP65	Transparent
QPE-00003Q-000	Transparent	ABS/PC/Metal	400 x 500 x 175	IP65	Transparent
QPE-00003R-000	Transparent	ABS/PC/Metal	400 x 600 x 200	IP65	Transparent
QPE-00003S-000	Transparent	ABS/PC/Metal	500 x 700 x 245	IP65	Transparent
QPE-00003T-000	Transparent	ABS/PC/Metal	350 x 500 x 195	IP65	Transparent
QPE-00003U-000	Transparent	ABS/PC/Metal	500 x 600 x 230	IP65	Transparent
QPE-00003V-000	Transparent	ABS/PC/Metal	600 x 800 x 260	IP65	Transparent
QPE-00003W-000	Blank (Plinth)	ABS/PC/Metal	300 x 400 x 165	IP65	Transparent
QPE-00003X-000	Blank (Plinth)	ABS/PC/Metal	400 x 500 x 175	IP65	Transparent
QPE-00003Y-000	Blank (Plinth)	ABS/PC/Metal	400 x 600 x 200	IP65	Transparent
QPE-00003Z-000	Blank (Plinth)	ABS/PC/Metal	500 x 700 x 245	IP65	Transparent
QPE-000040-000	Blank (Plinth)	ABS/PC/Metal	600 x 800 x 260	IP65	Transparent
QPE-000041-000	Blank (Plinth)	ABS/PC/Metal	750 x 1000 x 300	IP65	Transparent